

Installation Guide





ZK-L1& ZK-L2 Floor-Mounted Bracket

Version: 1.0

Dimensions


ZK-L1

Unit: mm

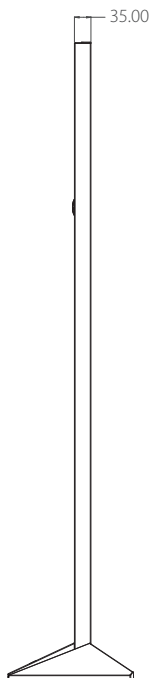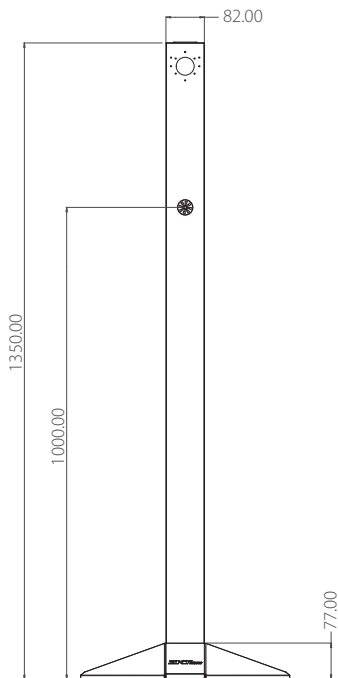




ZK-L2


Unit: mm





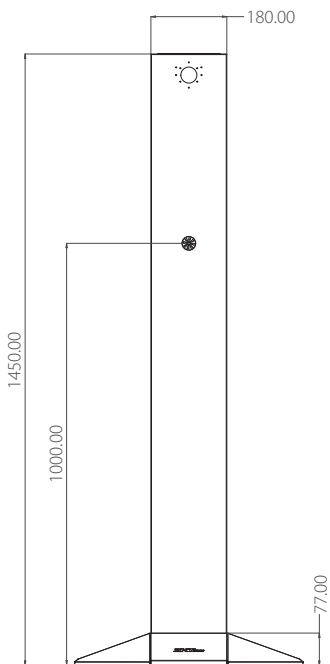



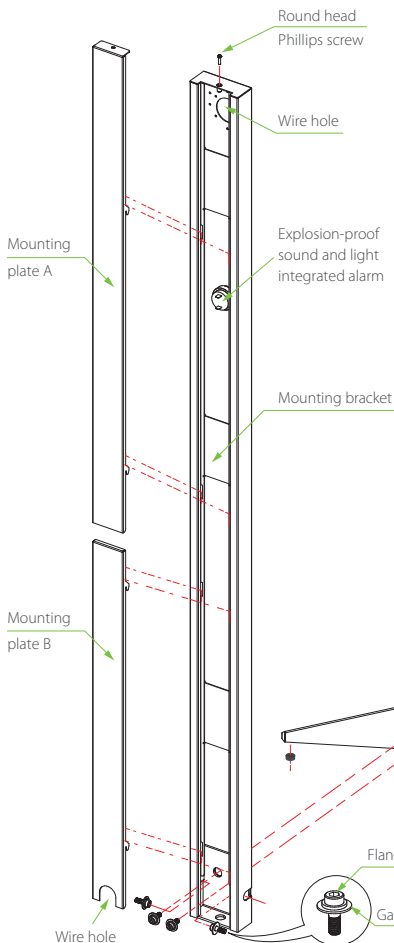

Mounting hole




Installation Diagram



Material package:

Product	Specification name	Quantity
	M3*6mm Countersunk screw	4
	M4*15mm Round head Phillips screw	2
	M6*16mm Flange bolt	4
	M6 Gasket	4
	M8*80mm Expansion bolt	2
	H5 Hexagon wrench	1
	Rubber pad	4
	Explosion-proof sound and light integrated alarm	1

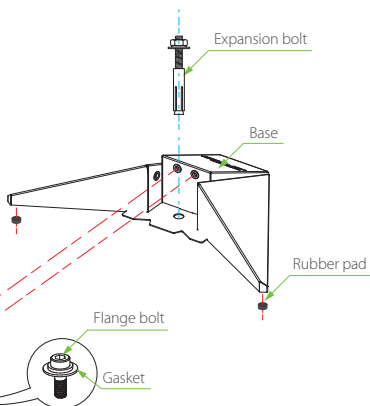


How to connect the mounting bracket with the base?

Step 1: Take out the base and the four flange bolts from the carton and other material packages from the carton.

Step 2: Take out the bracket from its carton.

Step 3: Put the bracket on the base and fix them with the four flange bolts as shown in the figure below.

Step 4: You can also fix them on the floor with an expansion bolt to make the base more stable.

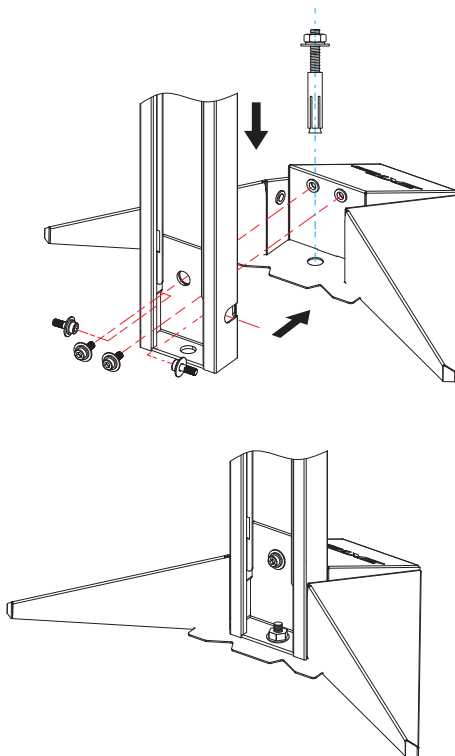

How to connect the device with the mounting bracket?


Step 1: Select the right mounting holes and fix the back plate on the mounting bracket using the countersunk screws.

Step 2: Pass the cables through the wire hole.

Step 3: Attach the device to the back plate.

Step 4: Fasten the device to the back plate with a security screw.

Compatible models: SpeedFace-V5 & V5L Series, Proface X Series, Elite Access, RevFace 10[TI], FaceDepot-7B / 7BL.

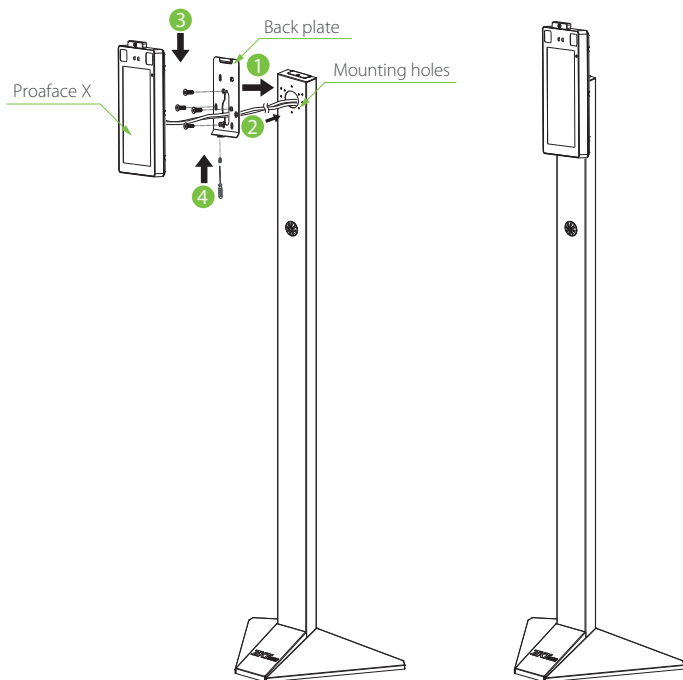


How to install the mounting plate?

Step 1: Please route the wires through the bracket before installation.

Step 2: First, snap the lower mounting plate B into the slot.


Step 3: The upper mounting plate A is then snapped into the slot and secured with a screw.

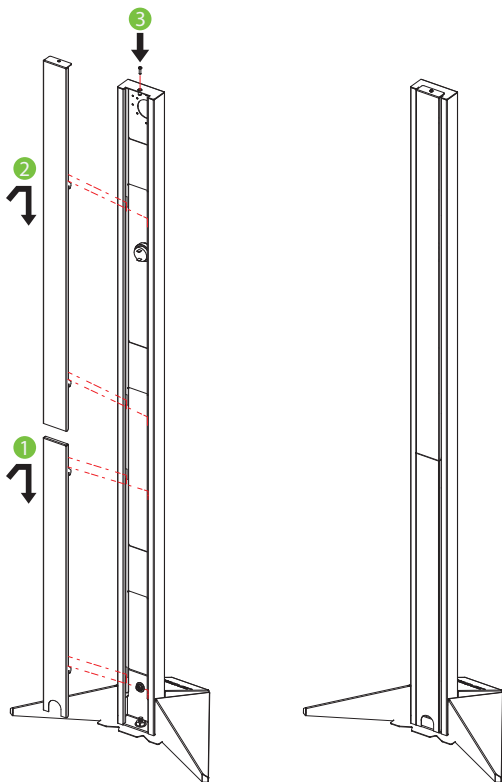

How to install the Rots-1 Visible Light Rotation Stand?

The Rots-1 visible light rotation stand is to meet the customer's needs for multi-angle use. It is an optional stand.

Installation Diagram:

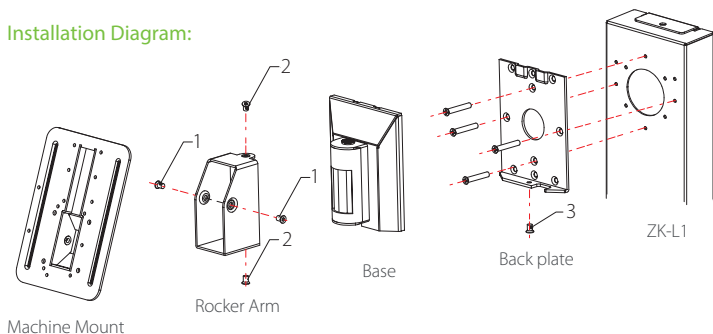


Step 1: Take out the Rots-1 from its carton.

Step 2: Unscrew the No.3 hexagon socket screw from the bottom of the Rots-1 using a screwdriver.

Step 3: Select the right mounting holes and fix the back plate on the ZK-L1 / ZK-L2 using the mounting screws.


Step 4: Fasten the base to the back plate with the No.3 hexagon socket screw.



Flexible angle adjustment with Rots-1 (Optional):

Vertical : 20°

Horizontal : 30°



How to install the device to the Rots-1?

Step 1: Select the right mounting holes and fix the back plate of the device on the Machine mount using the countersunk screws.


Step 2: Pass the cables through the wire hole.

Step 3: Attach the device to the back plate.

Step 4: Fasten the device to the back plate with a security screw.

Note: If the cables are difficult to pass through the wire hole, please unscrew the No.1 or No.2 hexagon socket screw of the Rots-1 and pass the cable first.



Compatible models: SpeedFace-V5 & V5L Series, Proface X Series, Elite Access, RevFace 10[TI], FaceDepot-7B / 7BL.

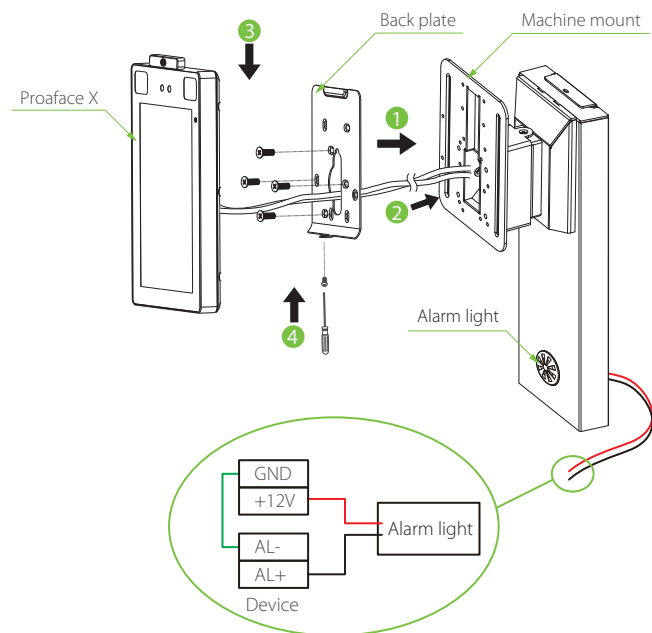


Mounting Hole Description for Compatible Models

Please choose different mounting holes for fastening the device according to the back plate of compatible models as shown below:


ZK-L1 / ZK-L2 mounting holes:



SpeedFace-V5 & V5L Series
RevFace 10[TI]
Proface X Series
Elite Access



SpeedFace-V5 & V5L Series
RevFace 10[TI]






FaceDepot-7B / 7BL

Mounting holes 2, 5, 7 & 10 are for installing the **SpeedFace-V5 & V5L Series**, the **RevFace 10[TI]**, the **Proface X Series** and **Elite Access**.

Mounting holes 1, 4, 6 & 8 are for installing the **SpeedFace-V5 & V5L Series** and **RevFace 10[TI]**.


Mounting holes 3 & 7 are for installing the **FaceDepot-7B / 7BL**.

Rots-1 mouting holes:




FaceDepot-7B /
FaceDepot-7BL


SpeedFace-V5 /
SpeedFace-V5L



ProFace X



Elite Series



RevFace10[TI]

Mounting holes 7, 13, & 16 are for installing the **FaceDepot-7B / FaceDepot-7BL**.

Mounting holes 7, 10, 13 & 16 are for installing the **SpeedFace-V5 / SpeedFace-V5L**.

Mounting holes 4, 8, 11 & 15 are for installing the **Proface X Series**.

Mounting holes 6, 9, 14 & 17 are for installing the **Elite Series**.

Mounting holes 5, 10, 12 & 18 are for installing the **RevFace10[TI]**.

ZKTeco Industrial Park, No. 26, 188 Industrial Road,
Tangxia Town, Dongguan, China.

Phone : +86 769 - 82109991

Fax : +86 755 - 89602394

www.zkteco.com

